



WORLD CLASS PERFORMANCE SINCE 1930

The Path to Beautiful Decorative Concrete

KEMIKO[®] REPELS

Low Viscosity Siloxane

KEMIKO[®] Repels is a waterborne silane/siloxane emulsion for sealing bare and KEMIKO[®] STONE TONE stained concrete and other cementitious substrates - new and existing stucco finishes, fired clay brick and other mortars.

Benefits Include:


- Excellent UV and Chemical Resistance
- Excellent Replacement Product for High VOC Solvent Base Water Repellents and Sealers
- 0 VOC
- Allows Substrate to Breathe
- Preserves Stained Concrete
- Reduces Efflorescence and Frost Damage
- Fast return-to-service time

Commonly Found In:

- Walkways
- Facades
- Pool Decks
- Residential Driveways
- Horizontal and Vertical Above-Grade Exterior Surfaces Requiring Extra Protection

Application:

This product is best applied by spraying but can be rolled or brushed. It does not give a wet look. Drying time is 1 hour for recoating, 4 hours for foot traffic, 24 hours for heavy traffic, and 48 hours to full cure.

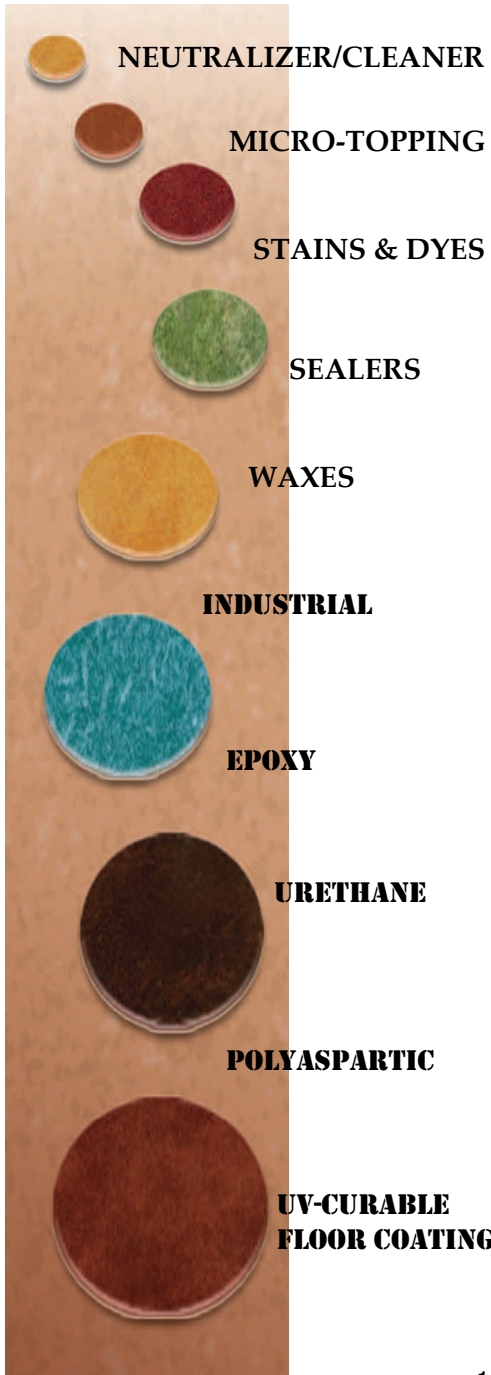

EPMAR CORPORATION

13240 Barton Circle, Whittier, CA 90605-3254 USA

T: (800) 845-4596 F: (562) 236-1175

www.kemiko.com www.rapidshield.com

Join us on Facebook under Kemiko Decorative and Industrial Coatings